



700 Series 8" Cove Wall Base


PRODUCT SUBMITTAL

Nominal Dimensions	8" (15.2 cm) x 50' (36.58 m) x 1/8" (3.2 mm)
ASTM F1861 - Resilient Wall Base	Type TP, Group 2, Style B
ASTM E648 (NFPA 253) - Critical Radiant Flux	Class 1, $\geq 0.45 \text{ W/cm}^2$
ASTM E662 (NFPA 258) - Smoke Density	Passes, ≤ 450
ASTM E84 - Flammability	Class A
CAN/ULC-S102.2 - Surface Burning	10 Flame Spread Rating, 60 Smoke Developed Classification
ASTM F925 - Chemical Resistance	Excellent with chemicals listed in standard, additional chart available
Sustainability Information	Made in the U.S.A. Meets Buy America Act (49 CFR Part 661) Meets Buy American Act (41 USC §§ 8301-8303) Contributes to LEED v4/4.1 NSF/ANSI 332 Platinum Certification FloorScore Certification Meets CA 01350 Requirements Meets CHPS Requirements HPD Available
Acclimation Time	48 Hours
Service & Storage Temperature	60° - 85° F
<i>See Installation document for full installation details regarding approved substrates, substrate preparation, job site conditions, & acclimation procedures</i>	
Product Warranty	5 Year Commercial
<i>See product warranty for full details regarding limitations & warranty coverage</i>	
Approved Adhesives	Excelsior WB-600, Wall Base Adhesive Excelsior C-631, Contact Adhesive
<i>See Installation document for full installation details regarding approved substrates, substrate preparation, job site conditions, & acclimation procedures</i>	
Technical Support	solutions@rhctechnical.com
Product Support	sales@roppe.com
Technical Documentation	www.roppe.com



700 Series 8" Cove Wall Base

PRODUCT SUBMITTAL

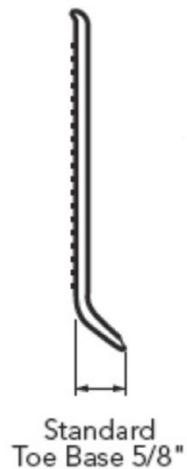

Attach Color Sample Here